



M3D-ALL42A1X 42" Presentation Monitor

The Enabl3D™ M3D-EM26A1X display represents the cutting-edge of multi-view auto-stereoscopic Presentation LCD technology. It combines superior resolution and unparalleled image quality with configurable I/O in a large format display for a wide range of digital signage applications. And its optional protective front glass ensures durability.


Key Features:

- **E3D™ Auto-Stereo Technology**
 - Full-HD 1080p (1920 x 1080) 9 point multi-viewing zones with True Volumetric Perception
- **True Volumetric Perception™**
 - Precision perspective of the visual content effect when going from depth to full POP
- **Ultra-Wide Viewing Angle**
 - 176 degree viewing angle
- **Prolonged Life Time**
 - 50,000 hours of viewing time to half of its original brightness
- **Durable and Professional Design**
 - All metal structure that's sleek & low-key look makes the content stand out
- **IRFM™**
 - IRFM technology helps prevent image retention
- **Configurable I/O**
 - Standard RGB and video input
- **Energy Saving Control**
 - Active ambient light sensor that adjusts brightness automatically

42" EMERSA PRESENTATION DISPLAY

ENABL3D™	
Optimal Viewing Distance (ft)	4' - 6'
True Volumetric Perception™	14"
3D Viewing Angle (Left/right)	50° / 50°
2D Viewing Angle	176° / 176°
Resolution	1920 x 1080
LCD PANEL	
Brightness	400 cd/m ²
Contrast Ratio	4000:1
Response Time	6.5 ms (GTG)
Supported Colors	16.7M colors
SIGNAL COMPATIBILITY / CONNECTIVITY	
Horizontal / Vertical Frequency	30 ~ 80 KHz / 56 ~ 75 Hz
Input Resolution	1920 x 1080 @ 60 Hz (Analog) 1920 x 1080 @ 60 Hz (Digital)
DDC	DDC 2B
Connector	VGA / DVI / Component / AV / S-video / Audio (optional) / HD-SDi (optional)
MECHANICAL	
Dimension w/o Stand (WxHxD)	1022.2 x 615.2 x 124.4 mm / 40.24" x 24.22" x 4.90"
Weight w/o Stand	Net: 30 kg / 66.14 lb, Gross: 36 kg / 79.37 lb
Wall / Arm Mount Type	200 mm x 200 mm / 200 mm x 400 mm VESA
Fanless Design	Yes
OSD FUNCTIONS	
OSD Control Function	RS232C, Push Button, IR Remote Controller
OSD Language Function	English, Japanese, Chinese
ELECTRICAL	
Power Supply	AC 100 V ~ 240 V (50/60 Hz)
Normal Operation / Power Off	≅ 231 W / ≅ 5 W
Suspend / Stand-By	≅ 15 W
Source Auto Detect	Yes
ENVIRONMENTAL	
Operating Temperature	5 °C ~ 40 °C, 80% RH
Storage Temperature	-20 °C ~ 60 °C, 80% RH
OTHER / OPTIONS	
Protective Surface	3mm AR Tempered Glass
HD-SDi / SDi	In x 2, Out x 1
DIMENSIONS	

INTERFACE

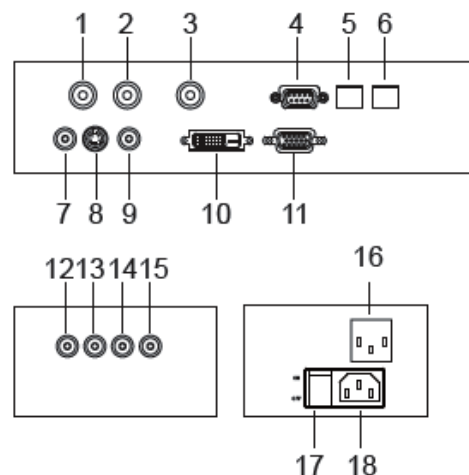

1. SDI In 1 (option)
2. SDI In 2 (option)
3. SDI Out (option)
4. RS232 In
5. RS485 In
6. RS485 Out
7. AV
8. S-Video
9. YPbPr
10. DVI
11. VGA
- 12.-15. Audio In / Speaker Out (option)
16. AC-out (2A)
17. Power Switch
18. AC-IN Connector

